


STRENGTH PERFORMANCE RELIABILITY

1.25" Side In Side Out (SISO)

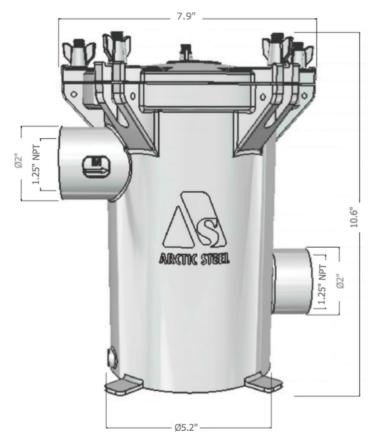

- Free standing, base mounted.
- Offset side female inlet, side female outlet.
- BSP or NPT thread.
- Electro-polished AISI 2205 Cast Stainless Steel Body.
- · Solid electro-polished stainless steel lid or
- Clear 8mm poly carbonate lid option available.
- Secured by 5 Stainless Steel wing nuts for safe, quick and easy access.
- Swing down eye bolts eliminate need to remove nuts.
- Full height, high impact resistance ABS basket.
- Durable silicone gasket.
- Anode connection point to combat electrolysis.
- Drain plug.
- Designed for applications that require a header tank or mounting above the waterline.

Strainer Solid Lid	Strainer Clear Lid	Flow Rate	Flow Rate
Weight lb	Weight lb	1.45 psi US gpm	14.5 psi US gpm
15lb	13.9lb	40	126