


## STRENGTH PERFORMANCE RELIABILITY

## 2.5" Bottom In Side Out (BISO)

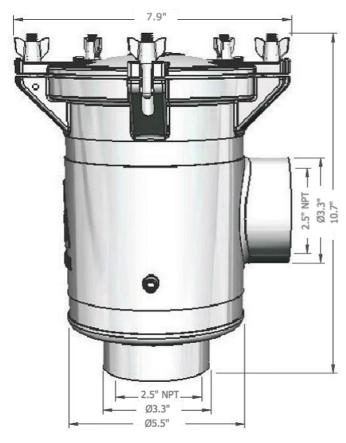

- Vertical female inlet, side female outlet.
- BSP or NPT thread.
- Electro-polished AISI 2205 Cast Stainless Steel Body.
- Solid electro-polished stainless steel lid or
- Clear 8mm poly carbonate lid option available.
- Secured by 5 Stainless Steel wing nuts for safe, quick and easy access.
- Swing down eye bolts eliminate need to remove nuts.
- Full height, high impact resistance ABS basket.
- Durable silicone gasket.
- Anode connection point to combat electrolysis.
- Side mounting bracket availble (316 SS)
- Adjustable bracket extension arm also available (316 SS)

Strainer Solid Lid	Strainer Clear Lid	Flow Rate	Flow Rate
Weight lb	Weight lb	1.45 psi US gpm	14.5 psi US gpm
13.7lb	12.8lb	169	